

HELULIGHT® SMART-PROCESS

*Intelligent LED Process
Visualization*



TECHNICAL DATA

Voltage	18 - 30 V
Analog controls	4-20 mA
Connection type	M8
Operating temperature	-20°C / +60°C
Lifetime	Min 60,000 h




KEY BENEFITS

- 1** Compatability with all common PLC
- 2** Greater process visibility
- 3** Invertible running direction
- 4** Color adjustment with memory function
- 5** Brightness adjustment with memory function

Progress Indicator

*Integrated progress bar for
series production*

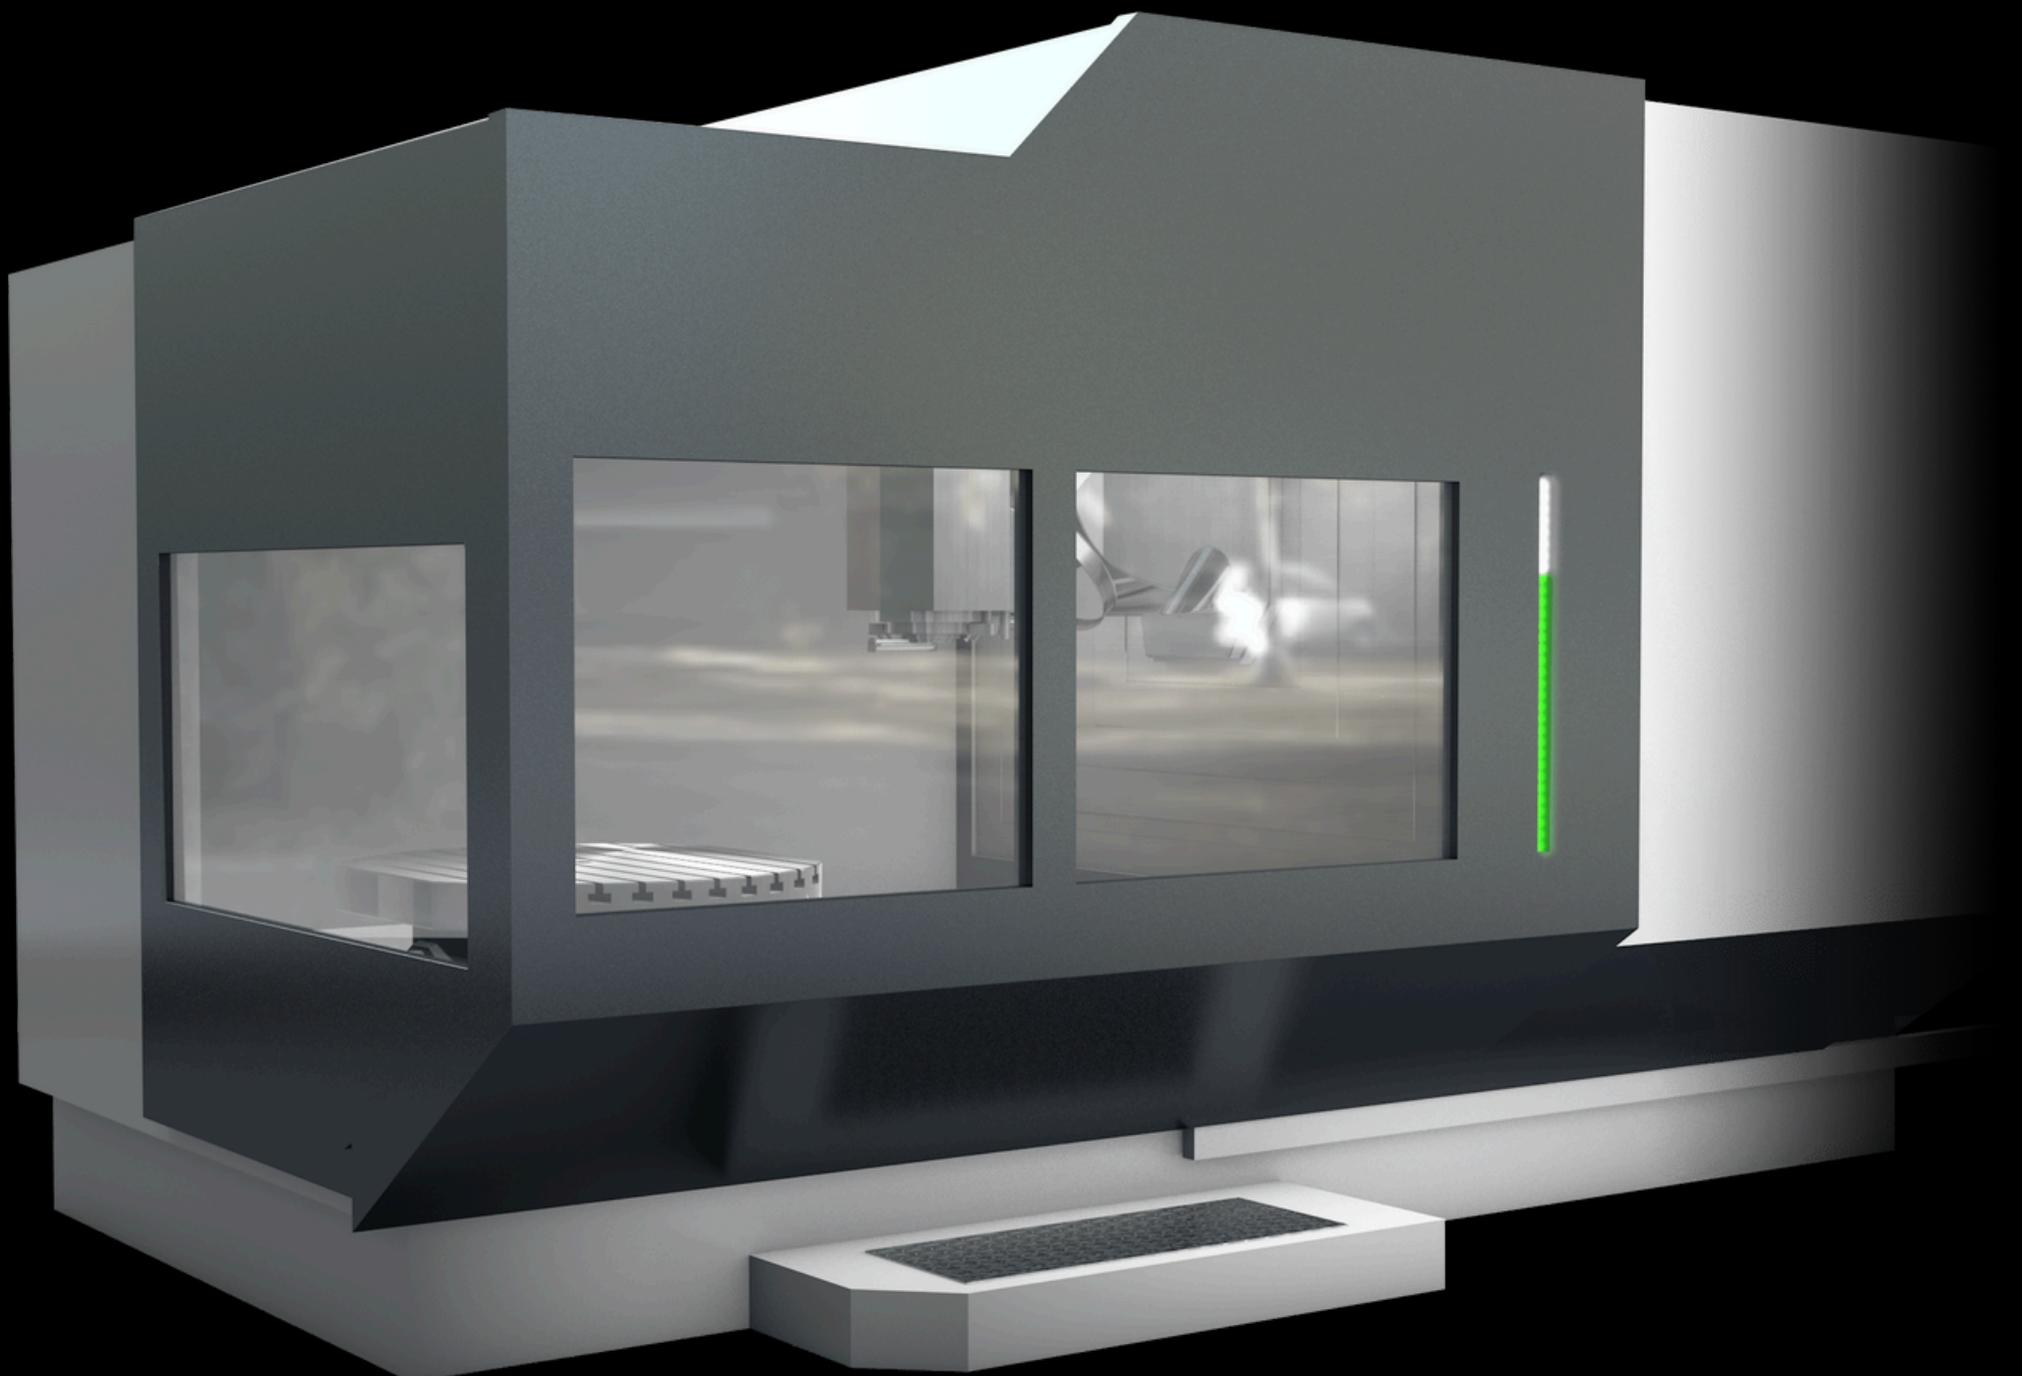

Progress Indicator


Display of production progress



***Half Fill-Level
Reached***

Progress Indicator


*Indication of finished
production processes*

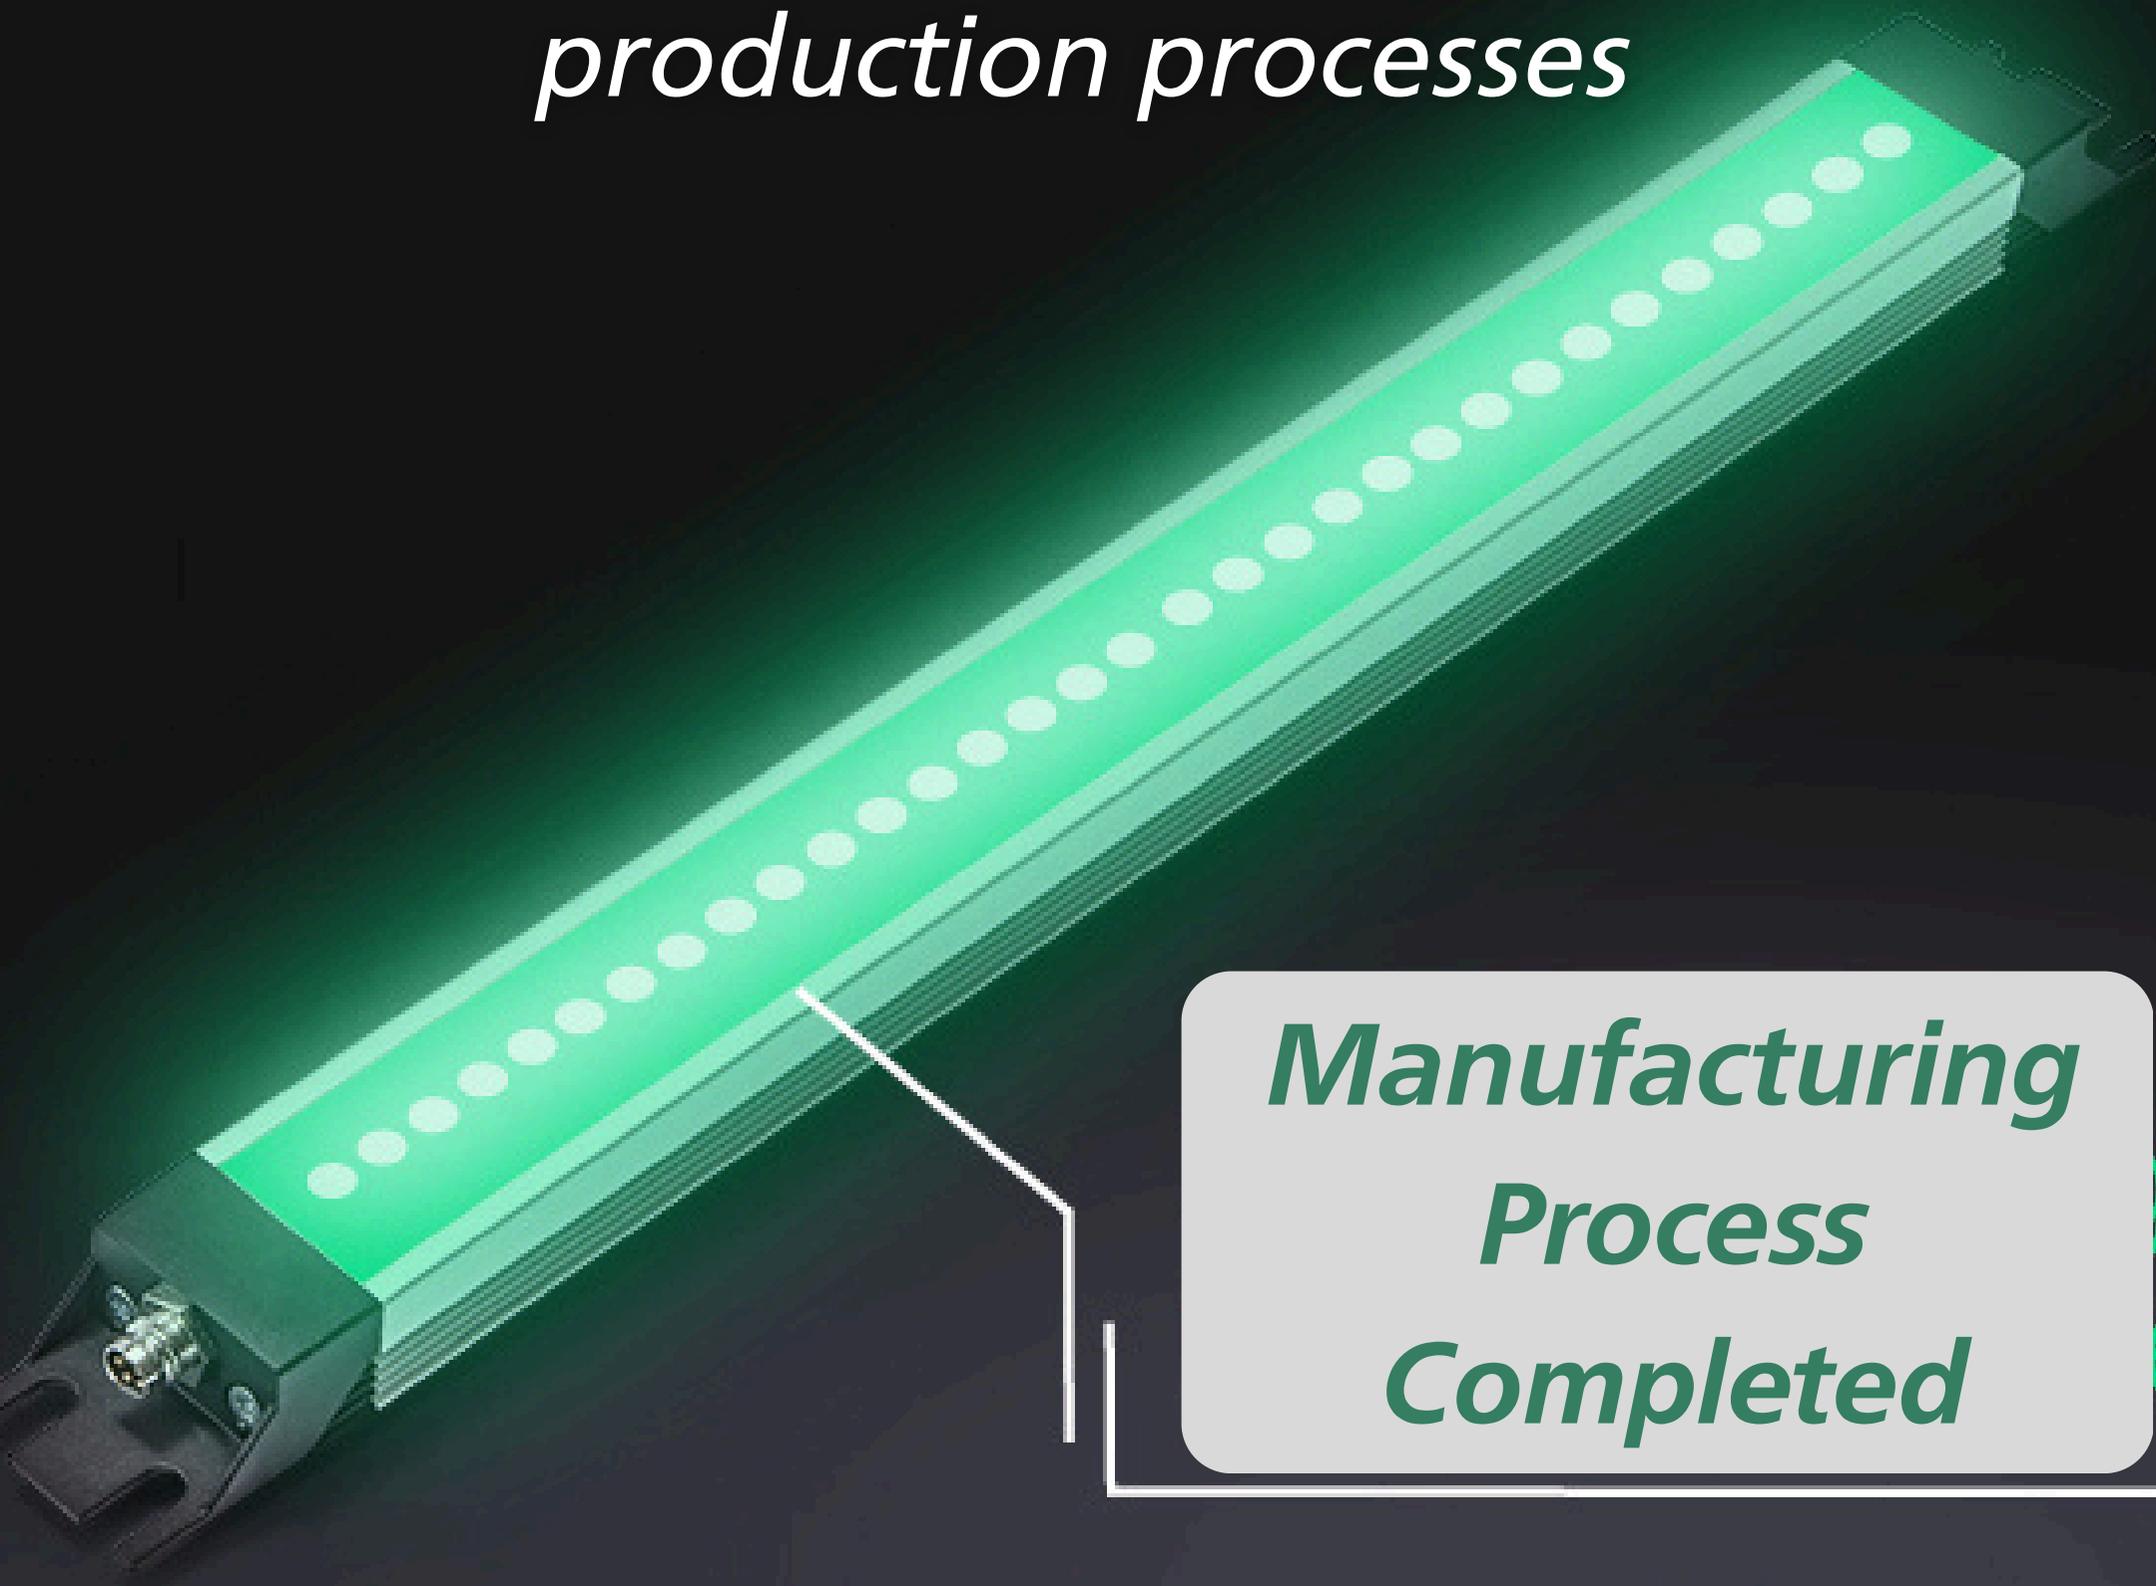

***Manufacturing
Process
Completed***

Progress Indicator

Signal function in the case of problem

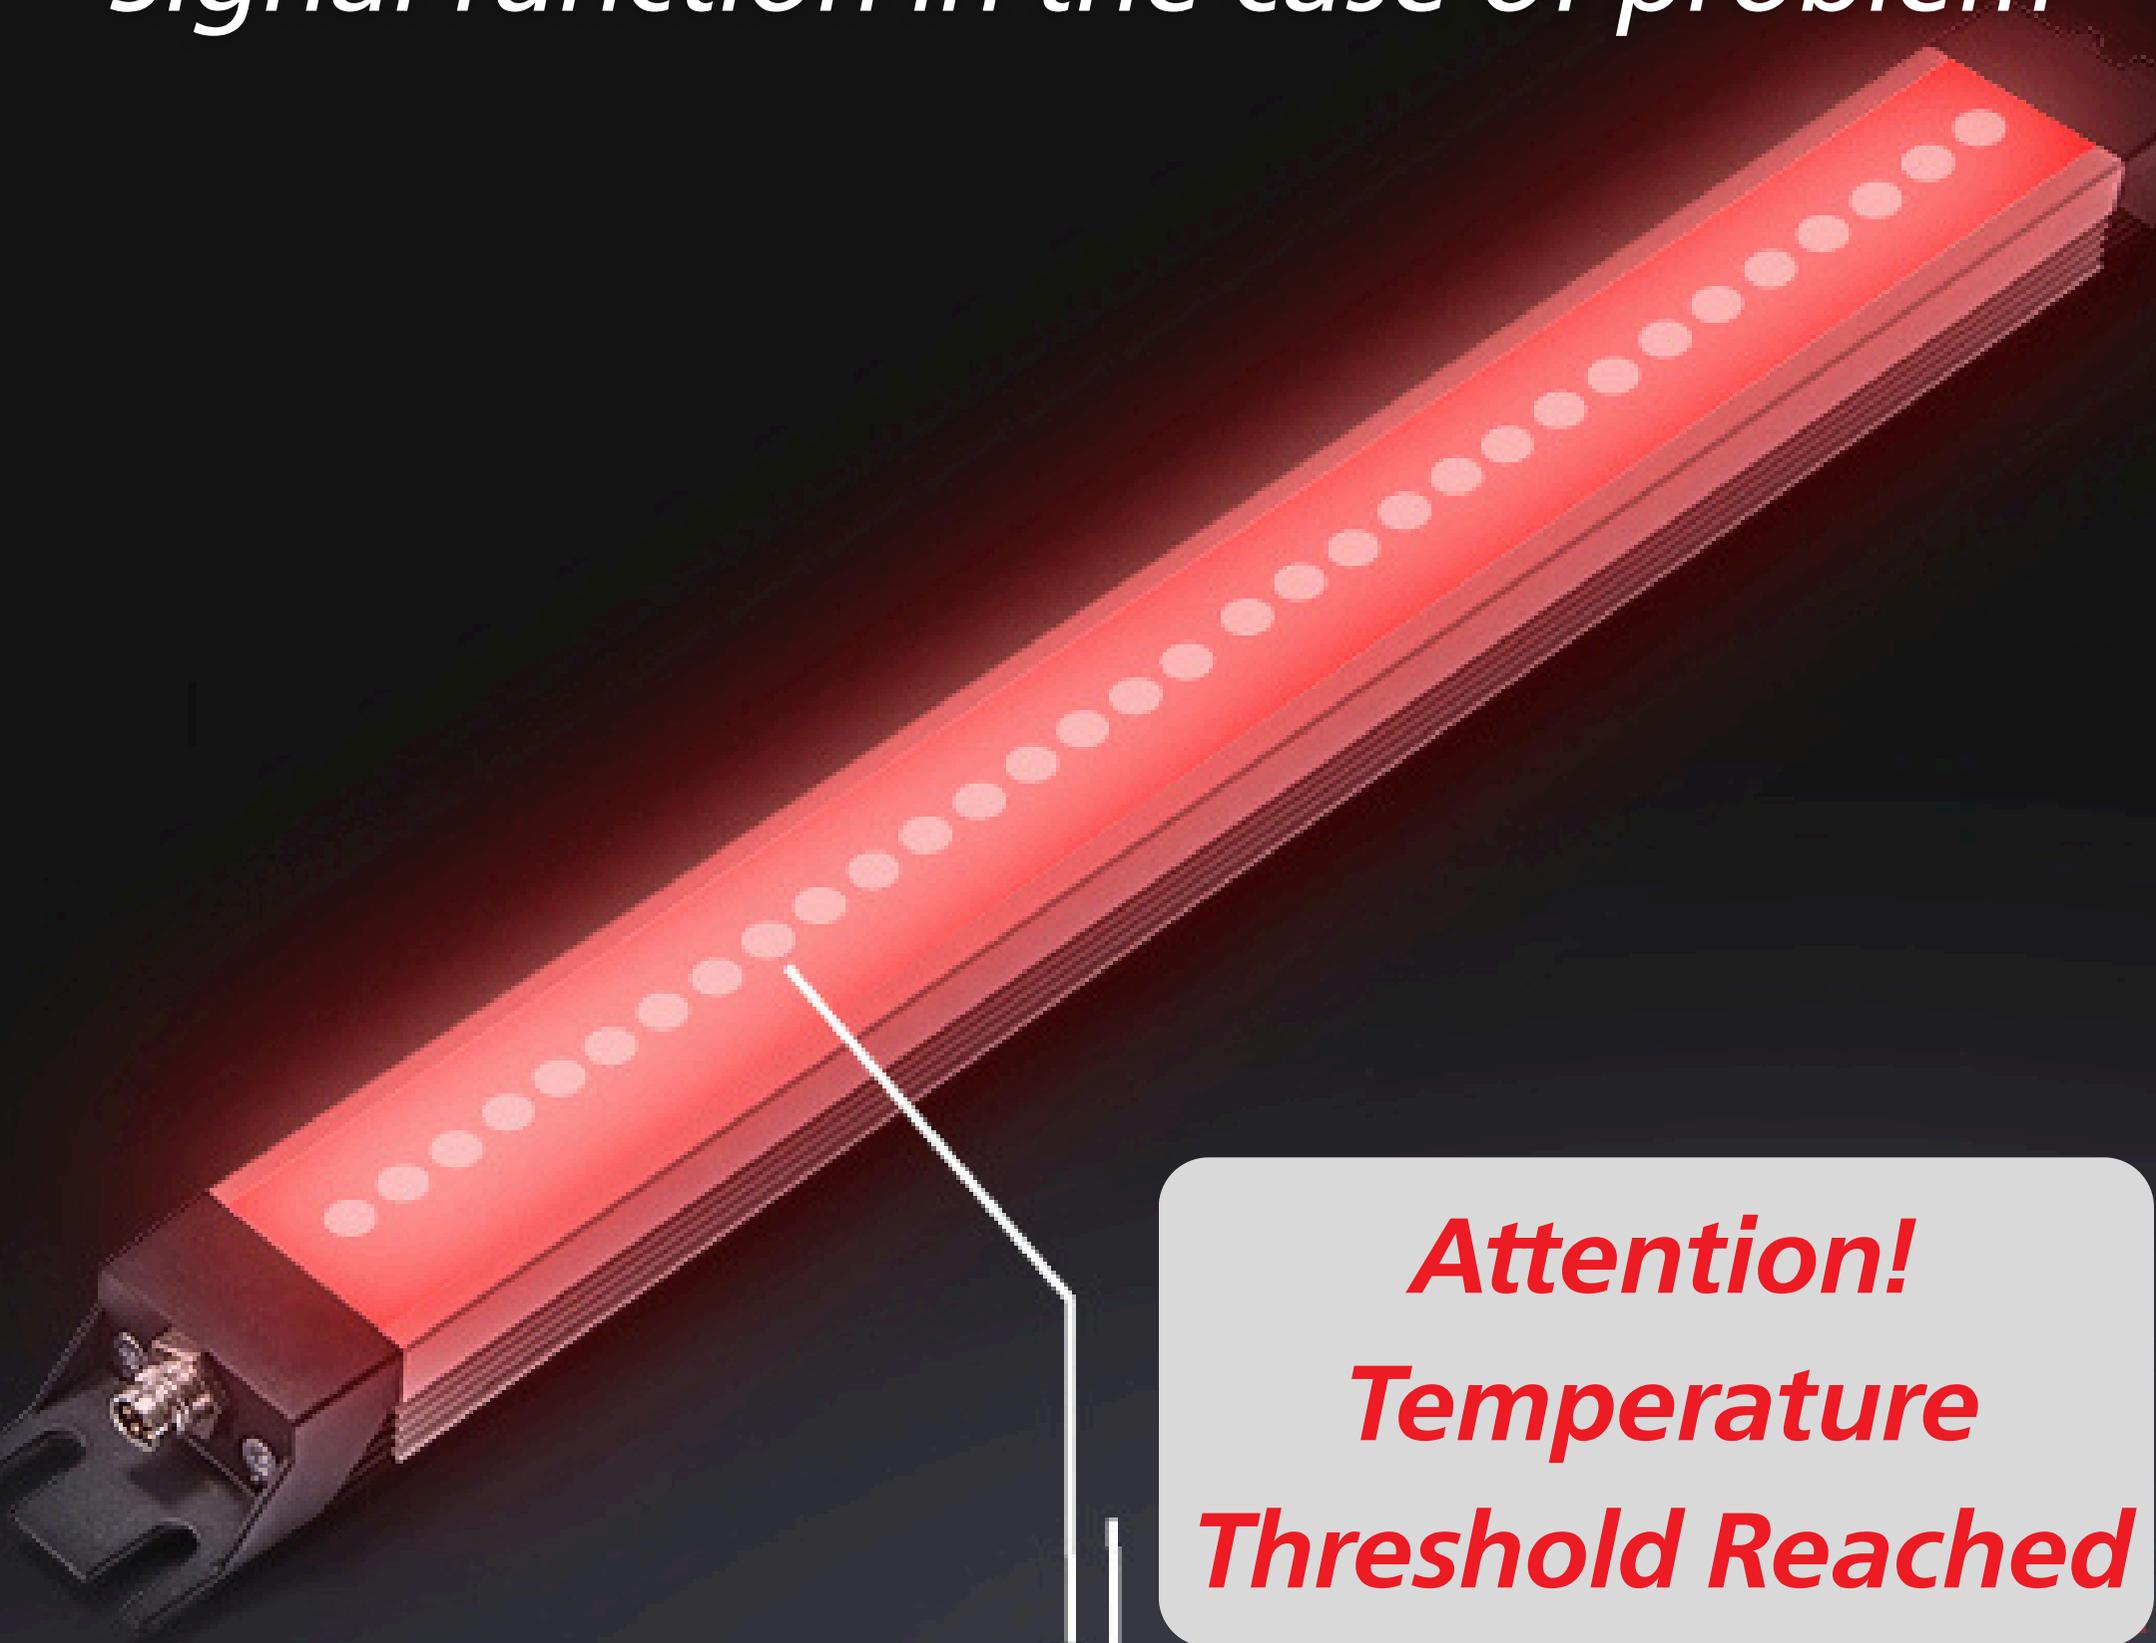

***Attention!
Temperature
Threshold Reached***

Chains, Cables, Assemblies: Quality from a Single Source

