


# Cu Earthing Strap

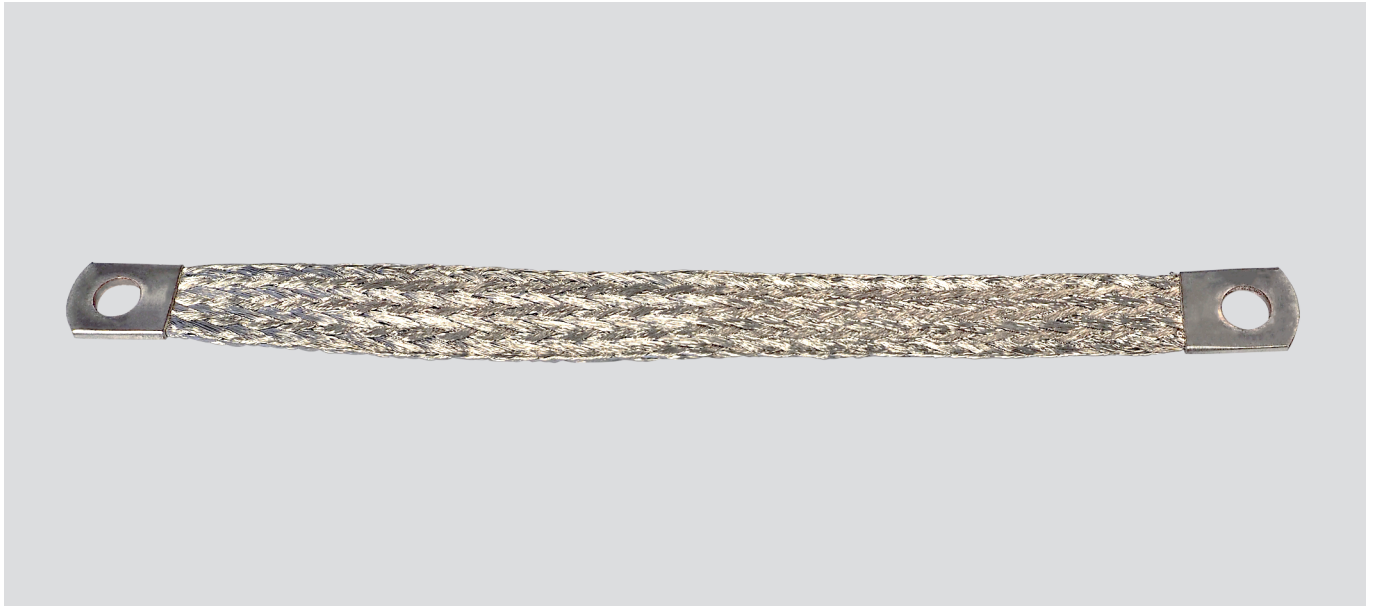

## Cu Earthing Strap

- for EMC applications (interference elimination)
- rounded contacts

## Application

- automobile industry
- robots
- control panel construction

## Material

tinned copper

## Note


- other lengths and inner diameters available on request

## Technical data

Temperature range: -20°C up to +125°C

individual strand size: 0.2 mm

contact areas made of seamless, pressed ferrules

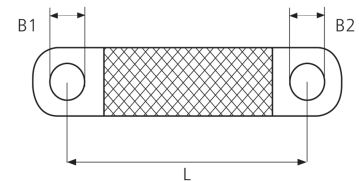

| Part no. | Type                       | Cross-section mm <sup>2</sup> | Length Drill hole in mm | Boring B1 in mm | Boring B2 in mm | Unit |
|----------|----------------------------|-------------------------------|-------------------------|-----------------|-----------------|------|
| 11008412 | HELU-MB-CUv-6-150-0507-R   | 6                             | 150                     | 4,5             | 6,5             | 50   |
| 11008411 | HELU-MB-CUv-6-500-0707-R   | 6                             | 500                     | 6,5             | 6,5             | 50   |
| 11008421 | HELU-MB-CUv-10-200-0707-R  | 10                            | 200                     | 6,5             | 6,5             | 50   |
| 11008422 | HELU-MB-CUv-10-200-0909-R  | 10                            | 200                     | 8,5             | 8,5             | 50   |
| 11008423 | HELU-MB-CUv-10-300-0707-R  | 10                            | 300                     | 6,5             | 6,5             | 50   |
| 11008424 | HELU-MB-CUv-10-300-0909-R  | 10                            | 300                     | 8,5             | 8,5             | 50   |
| 11008425 | HELU-MB-CUv-10-400-0909-R  | 10                            | 400                     | 8,5             | 8,5             | 50   |
| 11008442 | HELU-MB-CUv-16-100-0909-R  | 16                            | 100                     | 8,5             | 8,5             | 50   |
| 11008443 | HELU-MB-CUv-16-200-0707-R  | 16                            | 200                     | 6,5             | 6,5             | 50   |
| 11008445 | HELU-MB-CUv-16-200-0709-R  | 16                            | 200                     | 6,5             | 8,5             | 50   |
| 11008378 | HELU-MB-CUv-16-200-0909-R  | 16                            | 200                     | 8,5             | 8,5             | 50   |
| 11008446 | HELU-MB-CUv-16-250-0709-R  | 16                            | 250                     | 6,5             | 8,5             | 50   |
| 11008444 | HELU-MB-CUv-16-300-0707-R  | 16                            | 300                     | 6,5             | 6,5             | 50   |
| 11008447 | HELU-MB-CUv-16-300-0709-R  | 16                            | 300                     | 6,5             | 8,5             | 50   |
| 11008379 | HELU-MB-CUv-16-300-0909-R  | 16                            | 300                     | 8,5             | 8,5             | 50   |
| 11008441 | HELU-MB-CUv-16-400-0909-R  | 16                            | 400                     | 8,5             | 8,5             | 50   |
| 11008448 | HELU-MB-CUv-16-500-0909-R  | 16                            | 500                     | 8,5             | 8,5             | 50   |
| 11008449 | HELU-MB-CUv-16-600-0909-R  | 16                            | 600                     | 8,5             | 8,5             | 50   |
| 11008450 | HELU-MB-CUv-16-1200-0909-R | 16                            | 1200                    | 8,5             | 8,5             | 50   |
| 11008461 | HELU-MB-CUv-25-200-0909-R  | 25                            | 200                     | 8,5             | 8,5             | 50   |
| 11008462 | HELU-MB-CUv-25-300-0909-R  | 25                            | 300                     | 8,5             | 8,5             | 50   |
| 11009170 | HELU-MB-CUv-35-500-0909-R  | 35                            | 500                     | 8,5             | 8,5             | 50   |

Dimensions and specifications may be changed without prior notice.